SOLS Life

Powering Lives, Empowering Communities
www.solslife.com

Pico Solar 300RX

Pico Solar Home Lighting System

Sistem Lampu Rumah Tenaga Solar

1 x Sensor tube light

110x kerosene lamp

1x USB output phone charging

01 / Components:

Control Box

4 pcs Tube Lights
1 pc Sensor Tube Light



Solar Panel



Expanded Cable



5-in-1 Cable

Wall Mount Bracket

02 / Specification:

Accessories	Information
Solar Panel	10W 10V polysilicon + 6m cable
Battery	6.4V/6Ah-38.4Wh LFP
Tube light	4 pcs tube lights + 1 pc sensor tube light
Brightness	Turbo-220lm-1.45W, Mid-160lm-1.1W, Low-60lm-0.4W
Mobile phone charging	USB port 5V 2A output
Charge cable	5-in-1 USB mobile charge cable

03 / Working time:

4-5 HOURS — Solar Charging

6-22 HOURS — 5 pcs Tube Lights

5-6 TIMES — Phone(5.8Wh)

04 / Product Interface Connection:

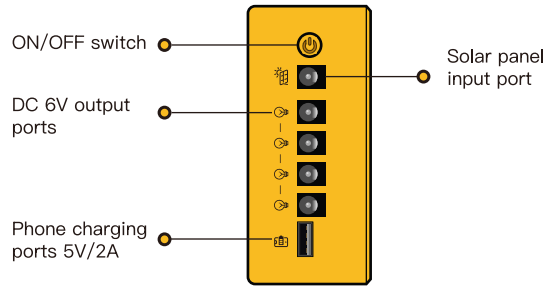

05 / Product Interface Connection:

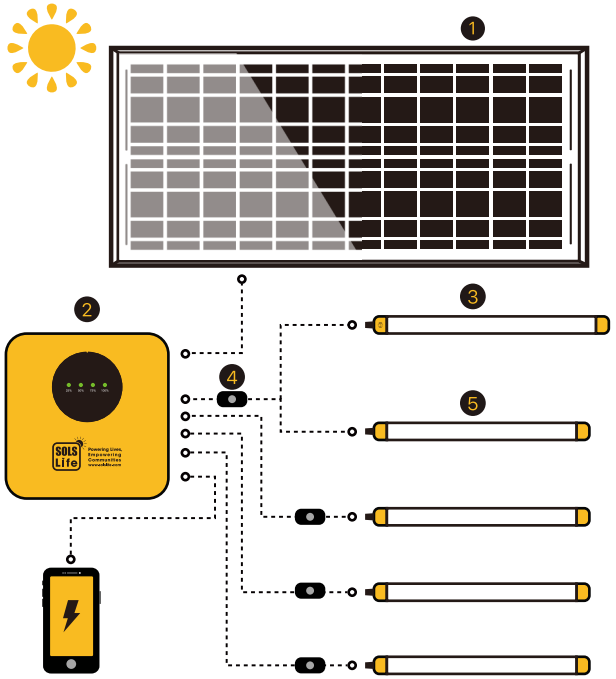

1 Solar Panel
2 Control box
3 1 pc Sensor Tube Light
4 Light Switch
5 4 pcs Tube Lights

Please fillin the relevant

Product information (required):	
Sales merchant:	
Product model:	
Date of purchase:	
Contact information:	
User address:	

Return reason/fault description:

SOLS Life

Powering Lives,
Empowering
Communities
www.solslife.com

Warranty Card

This product provides customers with a warranty of 24 months from the date of purchase

Guarantee conditions: When you need warranty service, please present this warranty card and please fillin the relevant contents thoroughly.Our company provides product users with a warranty period of 24 months from the date of product purchase

Warranty scope

1. Warranty covers product quality issues under normal use.
2. Damage caused by operational errors is not covered under warranty.
3. The warranty is void if the product is dismantled by the user.
4. The warranty is void if the product label is torn or removed.
   If the product is not covered under warranty, our company can provide maintenance services at the customer's expense.

06 / Control Box Installation:

Please prepare your own electrical installation tools and wear work gloves during installation.



1

Take out control box bracket plate and matching screws. At proper wall height, fasten screws to plate holes with a screwdriver.



2

Snap the controller box down onto the mounting bracket to complete the installation.

07 / Solar Panel Installation:

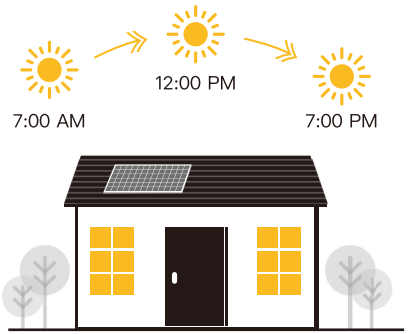

Tips:
Install solar panels in a location with full sun exposure and keep them clean.

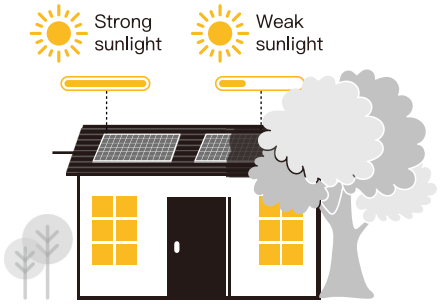

Tips:
Avoid shadows from blocking the panels to ensure efficient charging.

08 / Connect Lights:

Connect the lamp cable to the control box. Suspend the lamp from the ceiling, then turn on both the power switch and the lamp cable switch. The lamp will operate normally.

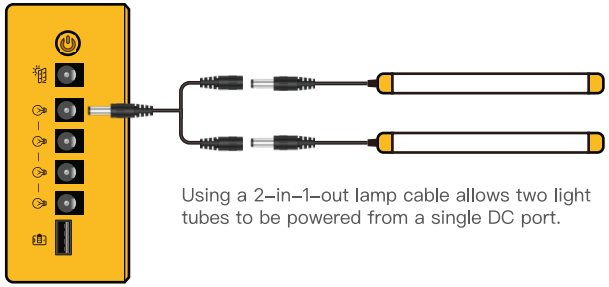

Using a 2-in-1-out lamp cable allows two light tubes to be powered from a single DC port.

09 / Safety Information:

Do not disassemble the product. For repairs, please contact after-sales service.

Never expose the products to high temperatures or fire.

Keep solar panel clean for best performance.

Ensure control box unit with battery are fully charged before long-term storage.